

Panasonic

頂側雙吸 全方位淨化油煙
Top and Side Vented
All-Round Fumeless Experience

FV-KTB2SD1HK

Panasonic 全新雙吸抽油煙機

Panasonic Double Ventilation Range Hood

打破傳統界限

頂吸側吸雙效抽油煙方式

雙吸齊下 效能倍增

Revolutionary design

Top and side ventilation for
Super-boosted performance



全新頂側雙吸設計

Brand-new Top and Side Double Ventilation

與傳統抽油煙機不同，FV-KTB2SD1HK 採用頂吸和側吸的雙重抽油煙方式，同時於距離爐頭較近的位置抽走煮食時產生的油煙，更能減少油煙漫佈至周邊生活空間。

Unlike traditional range hoods, FV-KTB2SD1HK adopts the double ventilation method – top and side ventilation. This allows the extraction of cooking odours from closer to the cooking areas to prevent them spreading to surrounding living areas.

LED 觸控式面板

靈敏操控 無縫易潔


LED Touch Control Panel

Easy Operation, Effortless Cleaning



與傳統抽油煙機比較

Comparison with Traditional Range Hoods




抽煙口較遠油煙容易散佈至周圍
Far away from source of fumes, so fumes easily spread to other spaces

傳統頂吸
Traditional Top Ventilation



易留油污 需頻繁清洗
Requires frequent cleaning due to accumulation of grease residue

傳統側吸
Traditional Side Ventilation

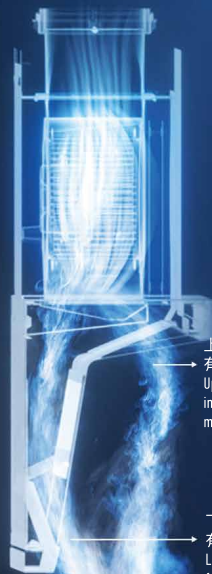

上部出風口 有效捕捉油霧
Upper exhaust inlet to capture oil mist

下部出風口 有效抽走油煙
Lower exhaust inlet for effective fume suction

雙吸抽油煙機
Double Ventilation Range Hood
FV-KTB2SD1HK

* 與本社其他型號相比
* Compared with other Panasonic models

澎湃核芯 強勁瞬吸

全新煮食體驗

Supreme Motor for Powerful Ventilation


Brand-new Cooking Experience

20m³/min* 澎湃吸力，中式爆炒所產生的油煙都可輕鬆抽走。無懼爆、炒、炆、燉、煎、炸、煮的挑戰，感受清新煮食新體驗。

Its powerful ventilation power at 20m³/min* can even handle fumes generated from Chinese stir-frying. No matter what cooking method you use, you will enjoy a refreshing cooking experience.

20m³/min

* 此數據為爆炒模式下的風量
*This is the volume in the ultra-high mode

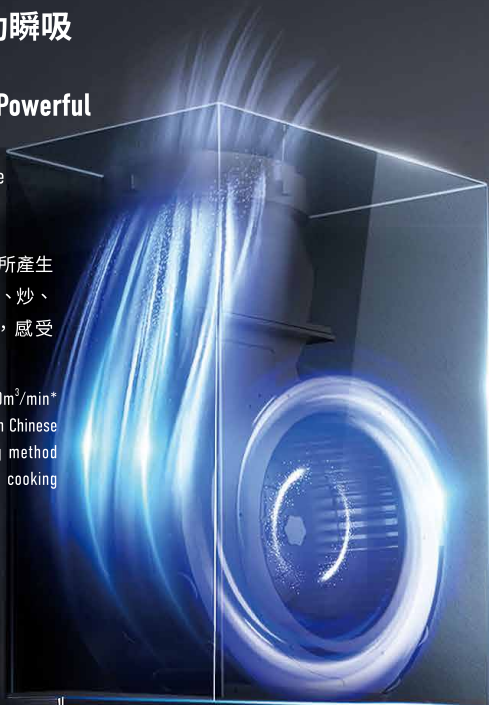

Panasonic
PLU200004K

POWER ON OFF LIGHT

3 段風力變速

瞬吸油煙 回復清新

3 Speed Options for Instant Fumes Ventilation

to Restore Air Quality

具備 3 段風力，因應煮食需求，有低速、高速及爆炒模式可供選擇。

Depending on the cooking conditions, there are low, high or ultra-high speed options available.




低速
LOW

小火慢炒 低速低噪
Gentle cooking
Low speed low noise



高速
HIGH

快火翻炒 高速抽味
Quick stir-frying
High speed fume removal



爆炒模式
ULTRA HIGH

大火爆炒 3 分鐘疾風勁吸
High-heat stir-frying
3 mins ultra high speed suction

大範圍吸力

高效抽油煙

Wide Coverage Area

for Efficient Fumes Suction

354mm

牆掛式側吸油煙，機身緊貼牆身，防碰撞

Wall-mounted for side ventilation. Unit stays close to wall to minimise obstruction.

895mm

擴大吸油煙範圍，近吸結構強力提升抽油煙效能，油煙不再停留

Increased ventilation coverage and improved efficiency by being close to source of fumes, to prevent fumes lingering.

354mm

895mm

安裝前確認事項


Items to Check Before Installation

煮食爐具面與抽油煙機底部的最小距離至少為 250 毫米，如下圖所示：

The minimum distance between the surface of cooking utensils on the cooking range and lowest end of the range hood must be 250mm, as shown in the illustrations below:

抽油煙機裝飾罩上沿需留有 350 mm 以上的空間，以確保排煙管順利通過。

There must be more than a 350mm gap above the upper edge of the range hood cover to ensure that the smoke duct can pass smoothly.

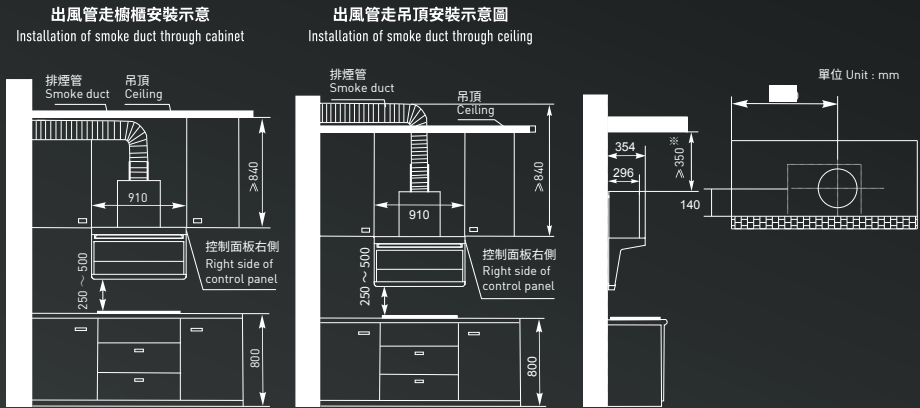

安裝提示 Installation Tips:

- 本產品可能帶有鋒利邊緣，在安裝時請務必戴上手套。
This product may have sharp edges. Do wear gloves when installing.
- 抽油煙機必須與爐具置中對齊。
The range hood must be aligned with the centre of the cooking range.
- 不要安裝在陽光直射的地方。
Do not install it in a place exposed to direct sunlight.
- 需確保氣體能經排煙管排出室外或公共煙道。
Ensure that vapours can be discharged outdoors or into a common flue through the smoke duct.
- 如需拆卸控制面板，控制面板右側需留有 25 mm 以上的空間。
If you need to remove the control panel, the right side of the control panel must have a space of more than 25 mm.

所需工具 Tools required:

(客人自備 to be provided by customer)

1. 沖擊電鑽
Electric impact drill
2. 10 mm 鑽頭
10 mm drill bit
3. 螺絲批
Screwdriver
4. 錘子
Hammer
5. 卷尺或鋼直尺
Tape measure or steel ruler
6. 水平尺
Spirit level

規格

Specification



型號 Model	FV-KTB2SD1HK
額定電壓 Rated voltage	220 V~
額定頻率 Rated frequency	50 Hz
額定輸入總功率 Rated power input	298 W
主電機額定輸入功率 Rated input power of main motor	295 W
照明燈額定輸入功率 Max. input power of LED lamp	3.0 W
風機數量 No. of fans	單風機 Single fan
風量 Air volume	18 m ³ /min
風壓 Air pressure	310 Pa
最大靜壓 Max. static pressure	355 Pa
噪音 Airborne acoustical noise	69 dB (A)
爆炒風量 Air volume at ultra high speed	20 m ³ /min
爆炒風壓 Air pressure at ultra high speed	330 Pa
爆炒最大靜壓 Max. static pressure at ultra high speed	370 Pa
爆炒噪音 Noise at ultra high speed	72 dB (A)
產品重量 Net weight	28.5 kg
排煙管外徑 Outer diameter of smoke duct	Ø185 mm

1. 風量、電氣特性資料是在靜壓為 0 Pa 狀態下的數值。
2. 噪音：A 加權聲功率級，有 +3 dB 的公差範圍。
3. 風量、風壓、最大靜壓、爆炒風量、爆炒風壓、爆炒最大靜壓：實測值與明示值的偏差不應超過明示值的 -10%。
4. 產品重量：機體自身重量加上油杯和出風口組件的重量。
5. 上述參數如有變動，恕不另行通知。

1. The data of air volume and electrical properties are values at a static pressure of 0 Pa.
2. Noise: A-weighted sound power level with a tolerance of +3 dB.
3. Air volume, air pressure, max. static pressure, air volume at ultra high speed, air pressure at ultra high speed, and max. static pressure at ultra high speed: the allowable difference between the actual measured value and the indicated value shall not exceed -10% of the indicated value.
4. Net weight: the weight of the body plus the weight of oil cup and adapter.
5. The parameters above are subject to change without notice.

本產品目錄只供參考，資料已經經過細心核對，如有錯漏，以廠方生產的規格為準。

本公司保留更改產品設計及規格之權利，恕不另行通知。如有任何爭議，信興電器貿易有限公司保留最終決定權。

顧客服務熱線：2833 0955
維修服務部熱線：2406 5666
零件部熱線：2406 5555
www.panasonic.hk

Panasonic[®]

Panasonic Ecology Systems Co., Ltd.